



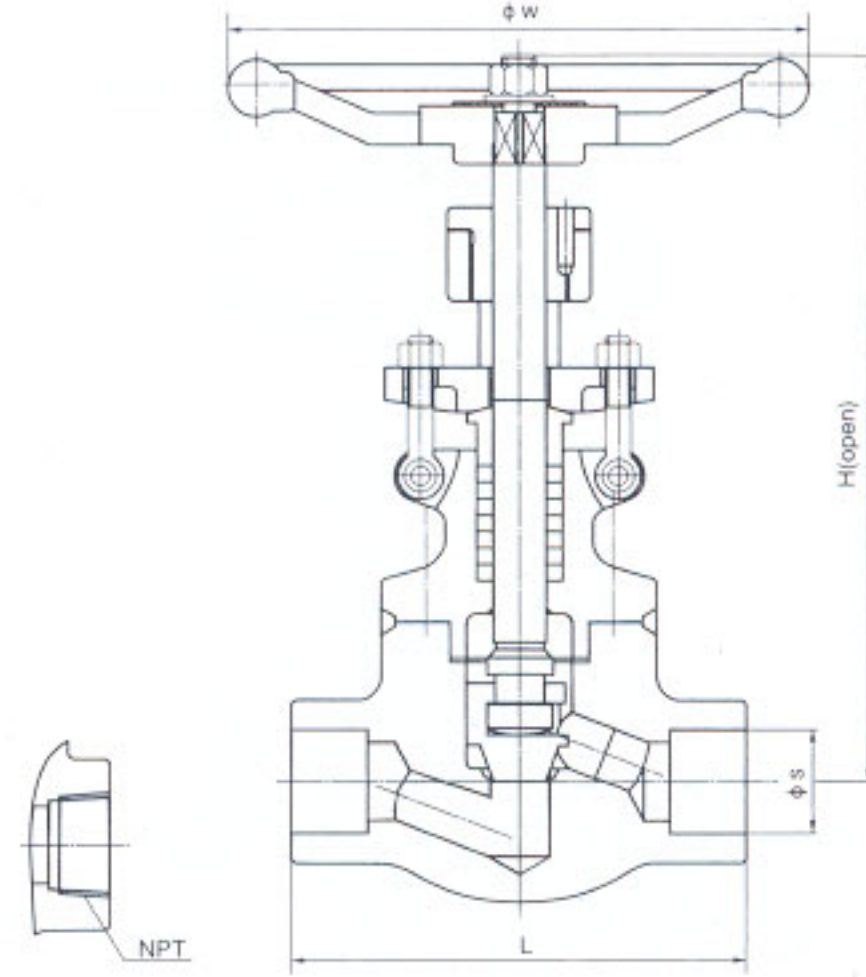

锻钢截止阀 FORGED STEEL GLOBE VALVE

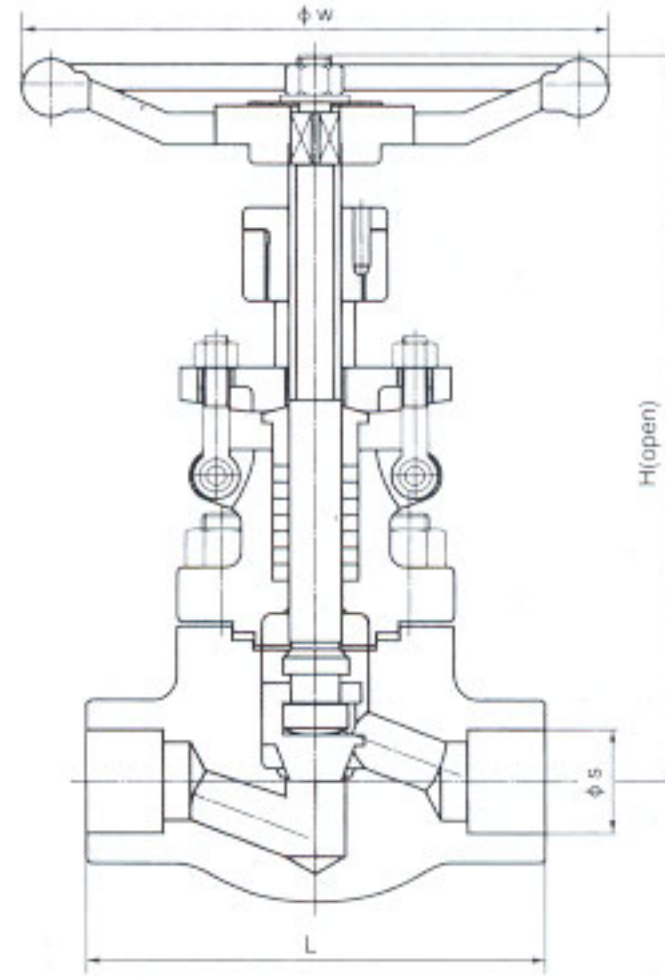

产品执行标准 Production enforce standard

设计规范 Design Spec	结构长度 Face to Face	螺纹端尺寸 End threads Dimension	试验与检验 Test & Check	压力-温度 Pressure-Temp	承插焊尺寸 Socket-weld Dimension
API 602	ASME B16.10	ASME B1.20.1	API 598	ASME B16.34	ASME B16.11

产品性能规范 Chief property and specification

公称压力 (Lb) Nominal Pressure	强度试验 Shell test		水密封试验 Water seal test		气密封试验 Air seal test	
	Mpa	Lbf/in ²	Mpa	Lbf/in ²	Mpa	Lbf/in ²
150	3.1	450	2.2	315	0.5 ~ 0.7	60 ~ 100
300	7.8	1125	5.6	815		
600	15.3	2225	11.2	1630		
900	23.1	3350	16.8	2240		
1500	38.4	5575	28.1	4080		

主要外形尺寸和重量 Main Dimensions & Weight

磅级 Class	口径Size		尺寸Dimensions (mm)					NPT	重量 Weight(kg)
	NPS	DN	L	d	S	H	W		
150~800	1/2	15	79	9.5	21.8	158	100	1/2	2
	3/4	20	92	12.7	27.1	192	100	3/4	3
	1	25	111	17.5	33.8	252	125	1	4
	1 1/4	32	120	23.8	42.6	252	160	1 1/4	6
	1 1/2	40	152	28.6	48.7	289	180	1 1/2	7
	2	50	172	36.5	61.1	330	200	2	11
900~1500	1/2	15	111	9.5	21.8	207	100	1/2	2
	3/4	20	111	12.7	27.1	207	100	3/4	3
	1	25	120	17.5	33.8	240	125	1	4
	1 1/4	32	152	23.8	42.6	258	160	1 1/4	6
	1 1/2	40	172	28.6	48.7	290	180	1 1/2	8
	2	50	220	36.5	61.1	337	200	2	13